


Version g has a SMD 16mm battery holder, plus separates the 2 connection LEDs so we can program messages independantly if needed to indicate status or errors.

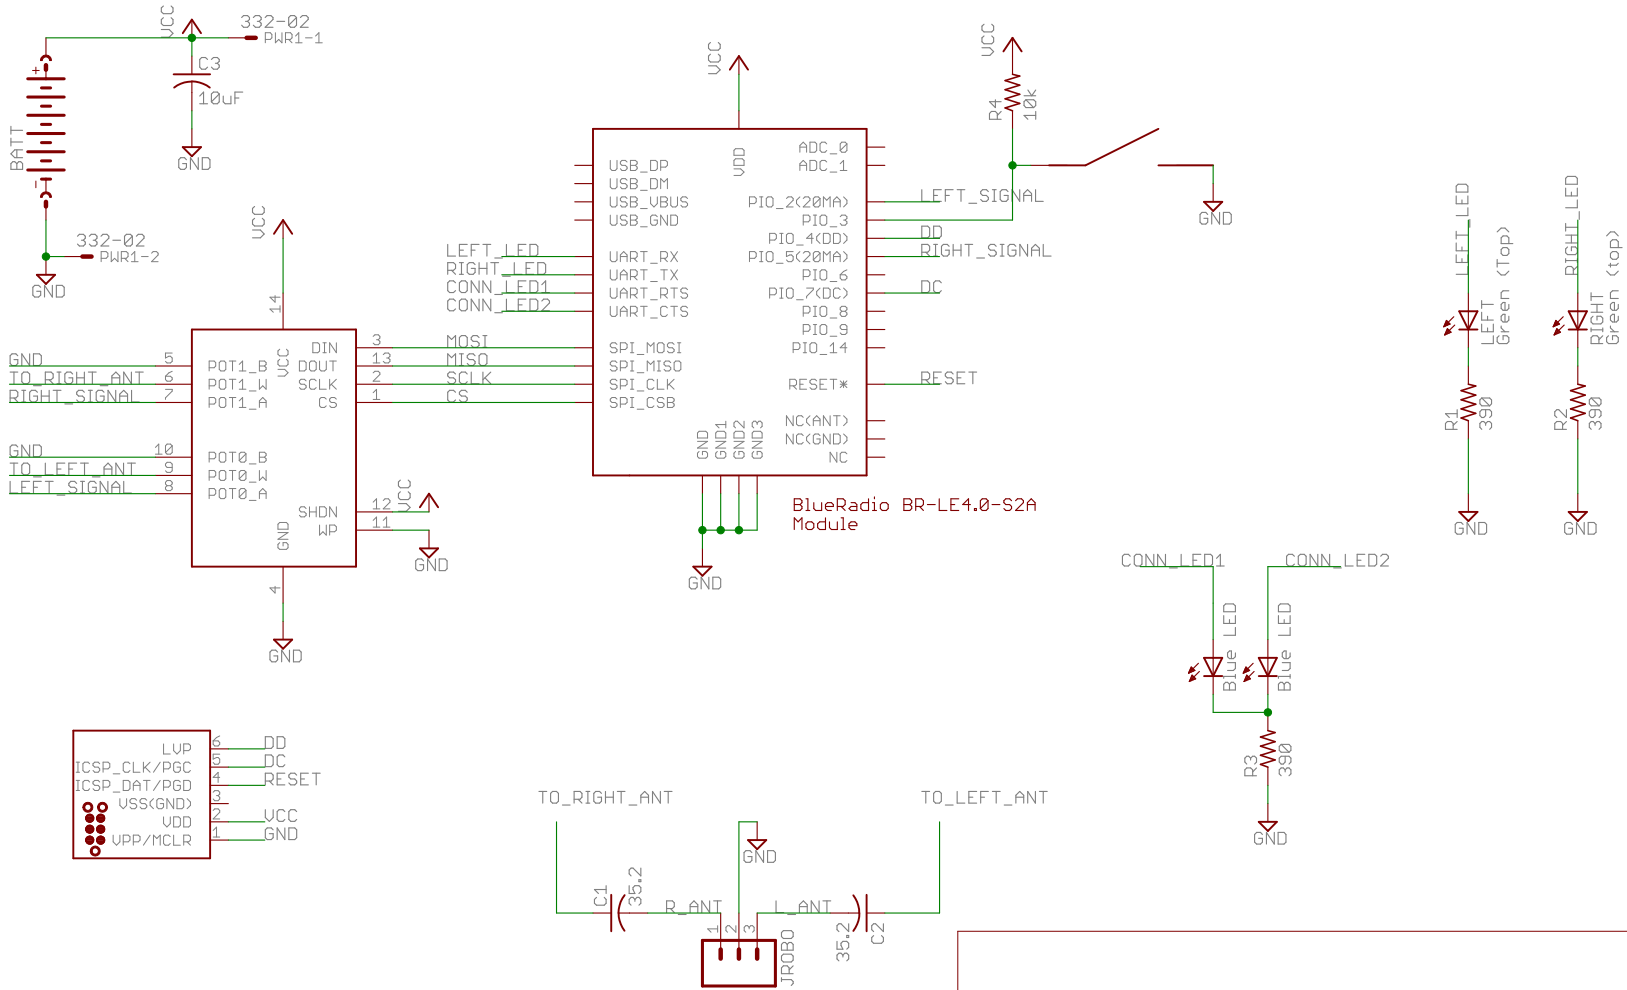

Antenna the Roaches Head!

```
#define ROBOROACH_PIO_LED_LEFT      11 //<SPI_CS>
#define ROBOROACH_PIO_LED_RIGHT    12 //<SPI_CLK>
#define ROBOROACH_PIO_LED_CONNECTION_1 13 //<SPI_MOSI>
#define ROBOROACH_PIO_LED_CONNECTION_2 10 //<SPI_MISO>
```

TITLE: RoboRoach.1.1b

Document Number:

REV:

Date: 9/4/13 6:59 PM

Sheet: 1/1